


GoRef


User Manual

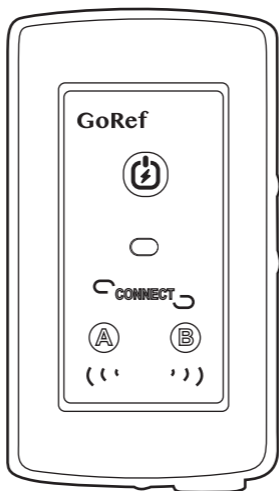

REFEREE COMMUNICATION SYSTEM

1. ABOUT

1.1 Product Details

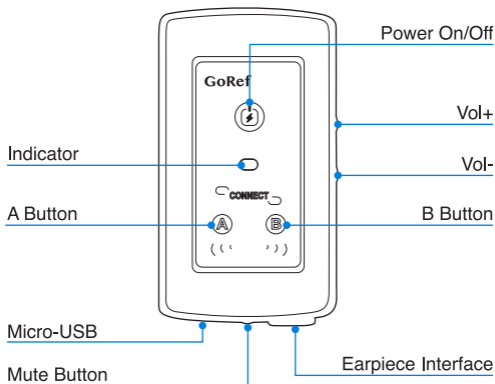

1.2 Package Contents



GoRef Unit



Armband




Manual



Earpiece



Box



Charging Cable



Spare Parts

2. GET STARTED

2.1 Operation Instruction



Single-click



Double-click



1s Long Press



Press Simultaneously



5s Press Simultaneously

2.2 Power On/Off



Power On

? "Power on"

■ Blue light



Power Off


? "Power off"

■ Light off

Long press the Power Button until the Blue light appears.

After power on, long press the Power Button until the light off.

2.3 Volume Control



Vol+: Single-click the Vol+ Button
Vol- : Single-click the Vol- Button

2.4 Muted




Double-click the Mute Button to mute your unit, you could only hear then.

2.5 Charging



Charging: ● Blue light
Full-charged: ● Light off

2.6 Reset



Long press the Vol+ & Vol- buttons for 5s until the red/blue lights appear.

2.7 Power Enquiry



After power on, double-click the Power Button to check the battery status.

? "Battery medium"

? "Battery low"

2.8 Reconnection



After all units are paired, double-click the B Button on the first unit to reconnect all units and sync.

3. INTERCOM PAIRING

3.1 Two-way Pairing



- ❶ Long press the **Power Button** on each for 3s to power on both units.

? "Power on"

■ Blue light



- ❷ Long press the **B Button** of Unit 1 and **A Button** of Unit 2 until both red/blue lights flashing, entering the pairing mode.

? "Intercom B pairing "

■ Red & Blue lights quick flash



- ❸ Both units will auto search and pair together, you could then start to communicate.


? "Intercom pairing successful "

■ Unit 1: Blue light flashes slowly

■ Unit 2: Red light flashes slowly

3.2 Three-way Pairing

- 1 Repeat all the above steps as “Two-way pairing”.

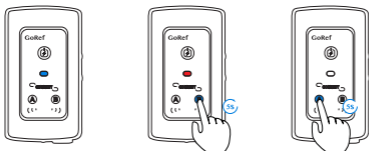

- 2 Long press the **B Button** on Unit 2 and **A Button** of Unit 3 until both red/blue lights flashing, entering the pairing mode.

? “Intercom B pairing ”

Red & Blue lights quick flash



- 3 The Unit 2 and Unit 3 will auto search and pair together. Meanwhile the Unit 1 loses connection temporarily.




- 4 Turn off all units, power on, and then double-click the **B Button** of Unit 1 to reconnect 3 units together and sync.

- Unit 1: Blue light flashes slowly
- Unit 2: Red/blue lights flash slowly
- Unit 3: Red light flashes slowly

3.3 Four-way Pairing


- 1 Repeat above step as 1, 2, 3 of “Three-way pairing”.

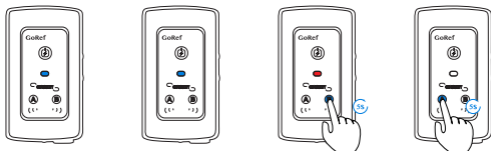


- 2 Long press the **B Button** on Unit 3 and **A Button** of Unit 4 until both red/blue lights flashing, entering the pairing mode.

? “Intercom B pairing ”

■ Red & Blue lights quick flash

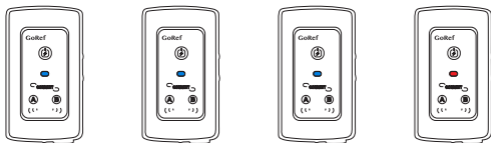

- 3 The Unit 3 and Unit 4 will auto search and pair together. Meanwhile the Unit 2 loses connection temporarily also.

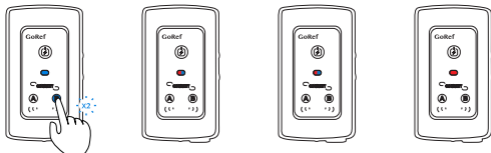

- 4 Turn off all units, power on, and then double-click the **B Button** of Unit 1 to reconnect 4 units together and sync.



- Unit 1: Blue light flashes slowly
- Unit 2: Red/blue lights flash slowly
- Unit 3: Red/blue lights flash slowly
- Unit 4: Red light flashes slowly

4 Firmware Upgrade

- 1 Connect the intercom to your computer with a data USB cable.



- 2 Open the upgrade tool on your computer, the UPG tool will read the current firmware version. Double click to select the new firmware. (.bin file)

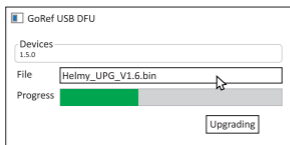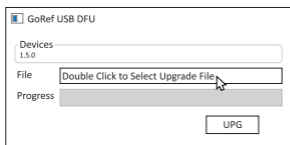

- 3 Once upgrading finished, then will show Upgrade Complete. If show any failed, please try it again with a different USB port.

